

hereby certify that this correspondence is being deposited with the United States Postal Service, with sufficient postage, as first class mail in an envelope addressed to:

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

On  
July 21, 2004

Date of Deposit

Steven P. Shurtz, Reg. No. 31,424

Name of applicant, assignee or  
Registered Representative

*Steven P. Shurtz / ojs*  
Signature

7/21/04  
Date of Signature

**RECEIVED**

**AUG 02 2004**

**TC 1700**

**Case No. 8864-24**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of:

Griffith D. Neal

Serial No: 09/983,002

Examiner: Jill L. Heitbrink

Filed: October 17, 2001

Group Art Unit: 1732

For: METHOD OF  
ENCAPSULATING HARD DISC  
DRIVE AND OTHER  
ELECTRICAL COMPONENTS

**SUBMISSION OF FORMAL DRAWINGS**


Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Dear Sir:

Enclosed are 9 sheets of formal drawings (Figures 1-10), including changes proposed in the amendment to the drawings filed herewith.

Respectfully submitted,

Dated: July 21, 2004

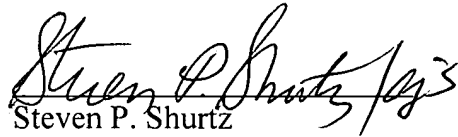A handwritten signature in cursive script, appearing to read "Steven P. Shurtz / g3".

Steven P. Shurtz  
Registration No. 31,424  
Attorney for Applicant

BRINKS HOFER GILSON & LIONE  
P.O. BOX 10395  
CHICAGO, IL 60610  
(312)321-4200  
Direct: (801) 444-3933

RECEIVED  
AUG 02 2004  
TC 1700

FIG. 1

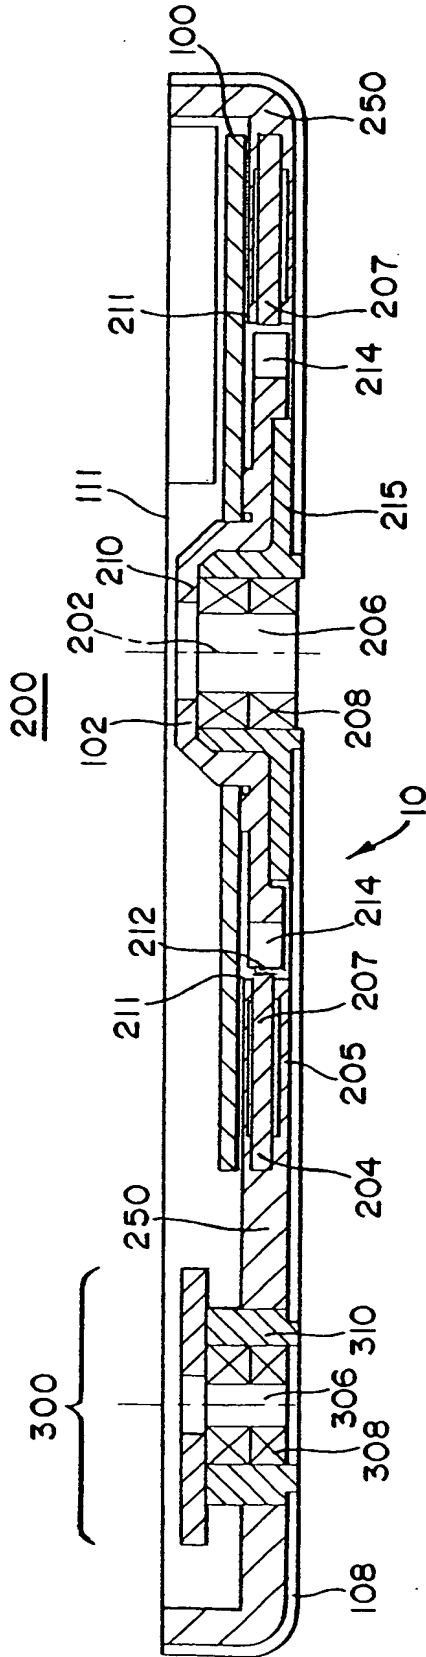


FIG. 2

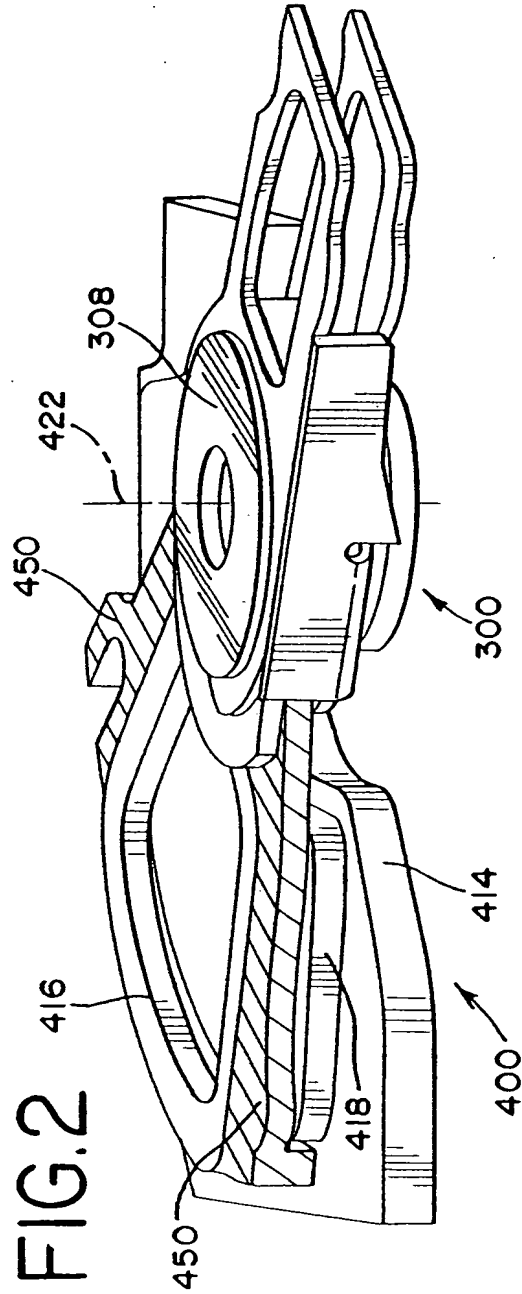


FIG.3

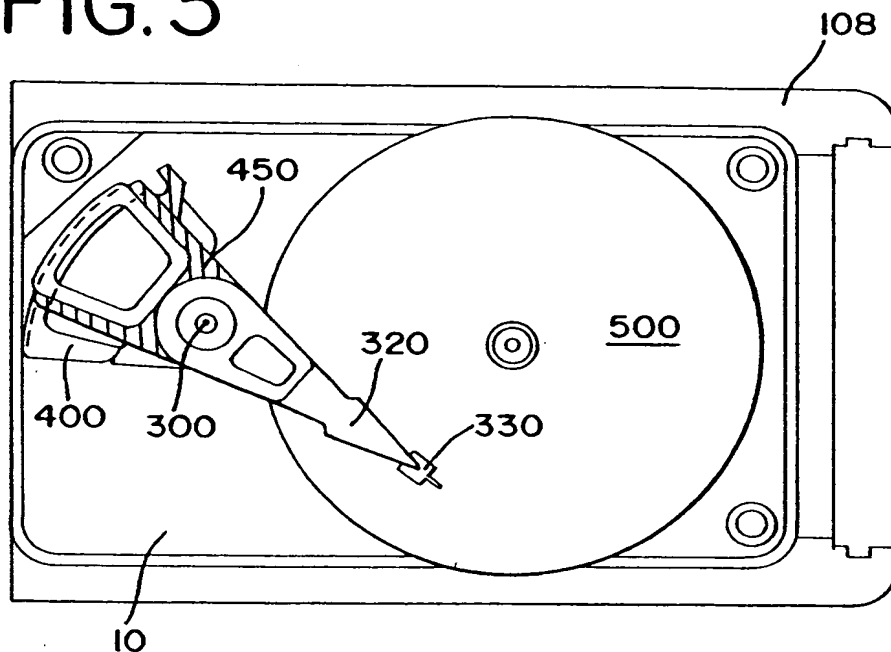


FIG.4a


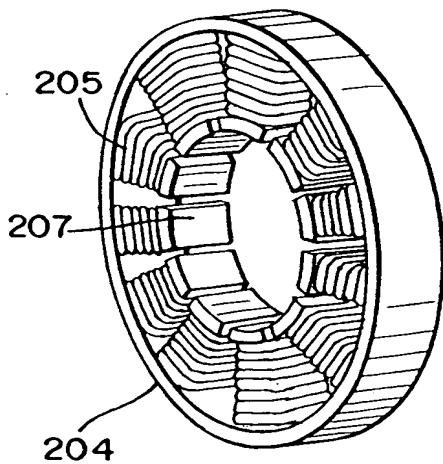


FIG.4b

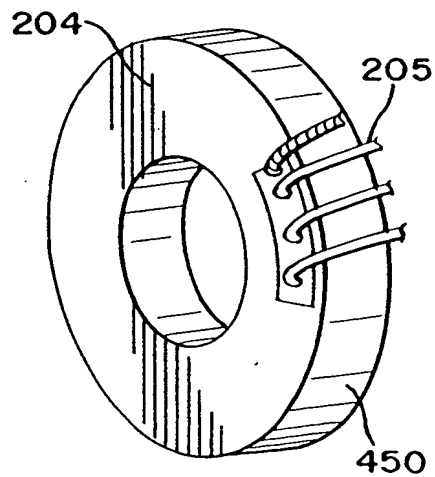

RECEIVED  
AUG 02 2004  
TC 1700

FIG.5

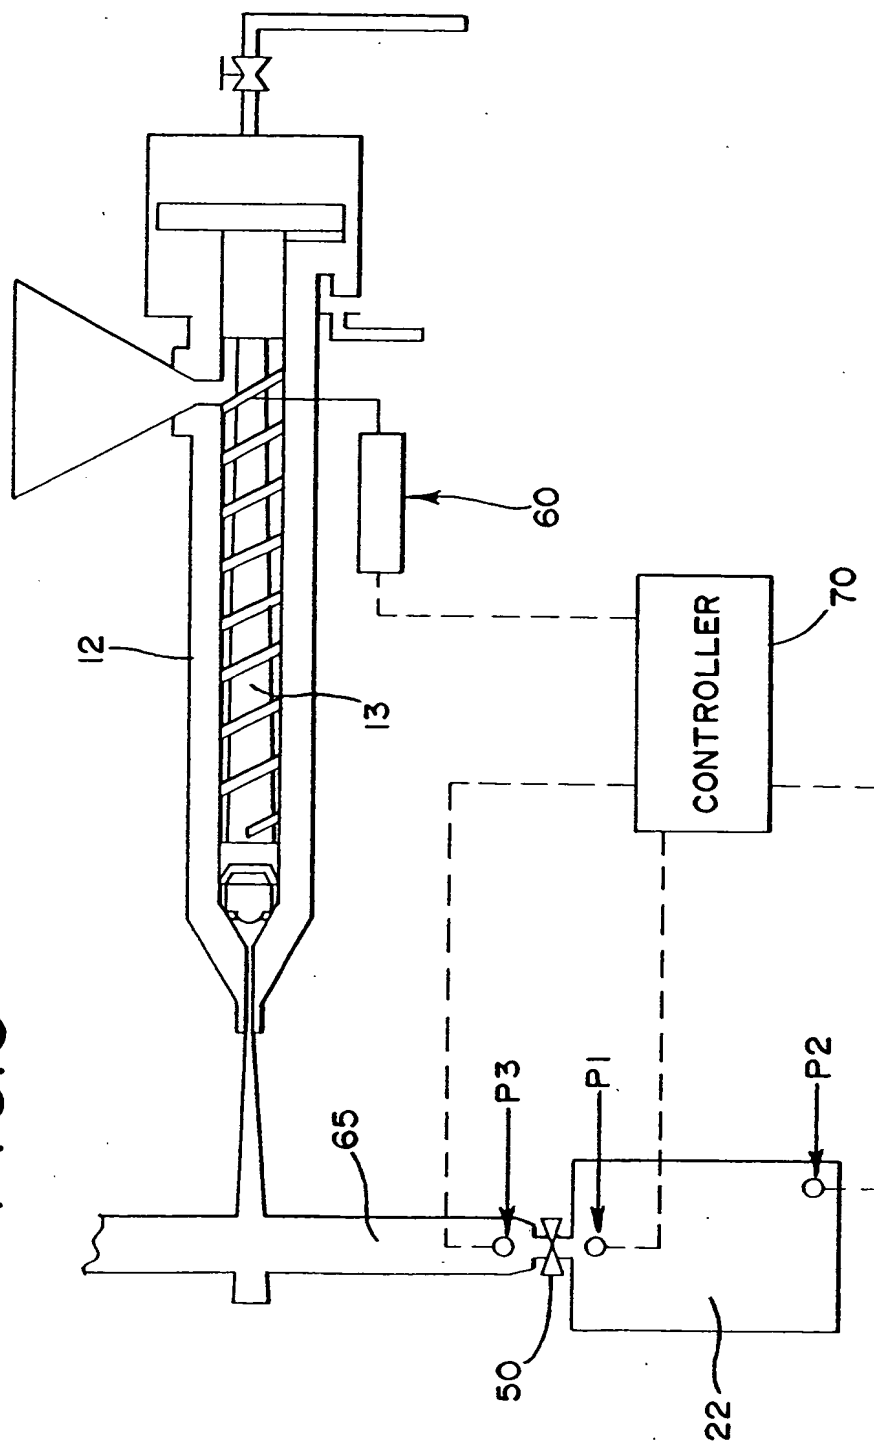


FIG. 6b


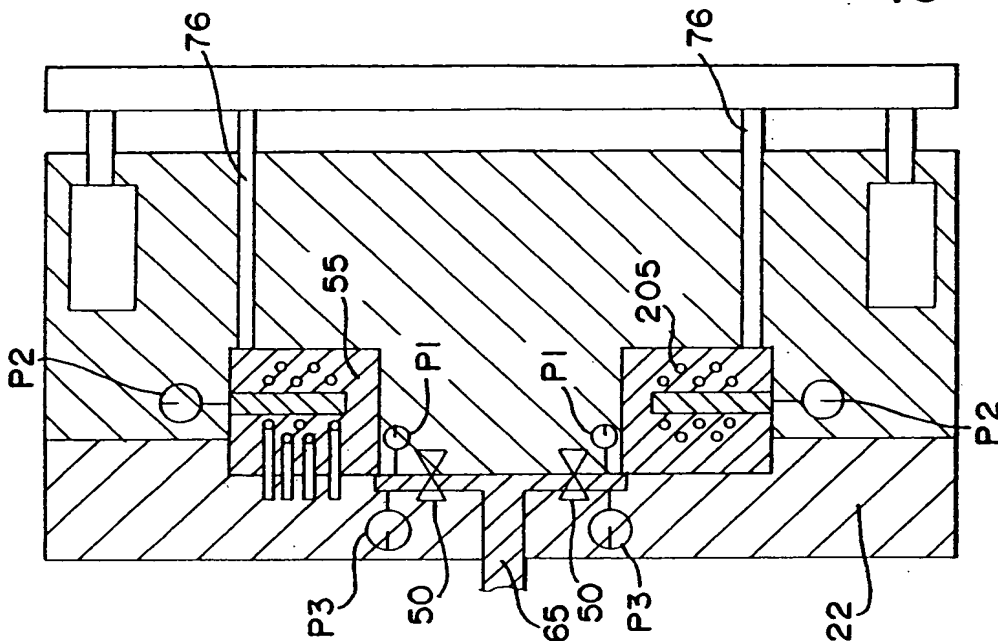



FIG. 6a



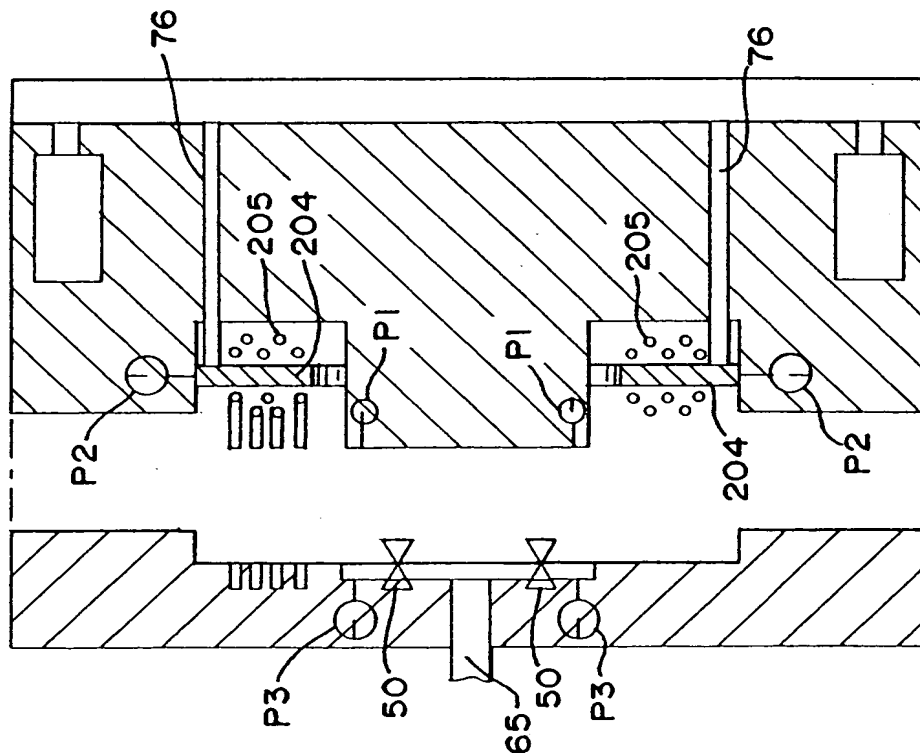

RECEIVED  
AUG 02 2004  
TC 1700

FIG.7

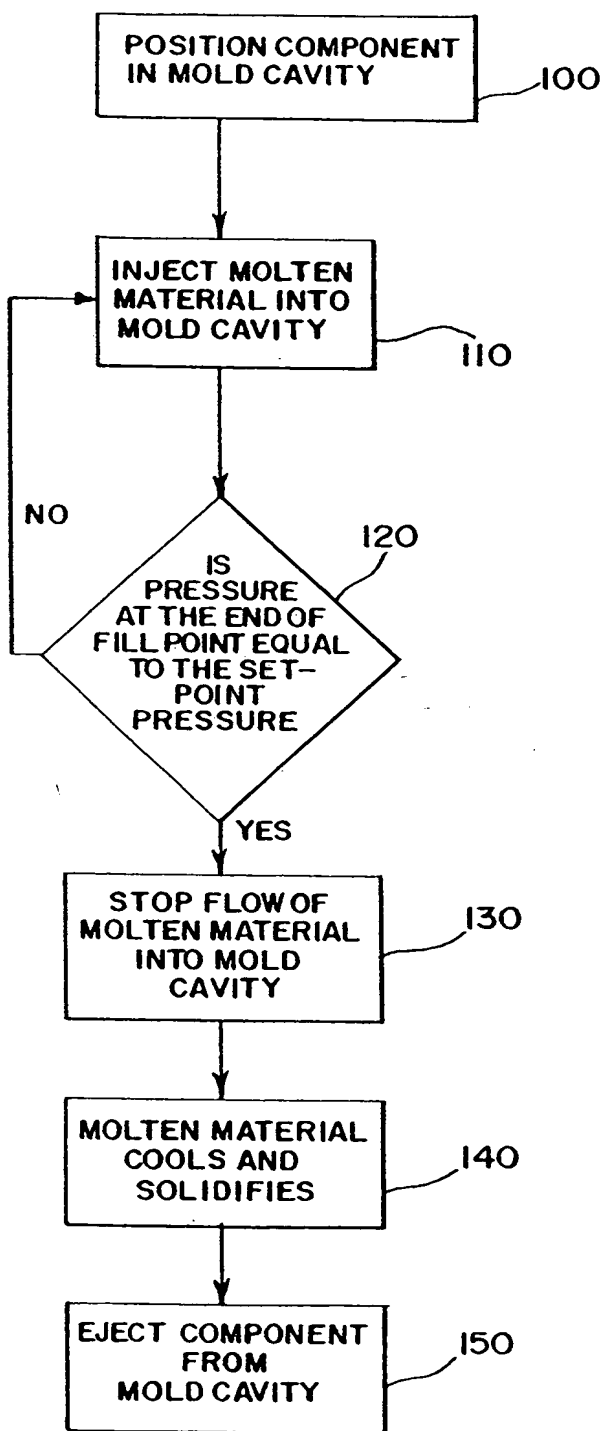




RECEIVED

AUG 02 2004

TC 1700

FIG.8

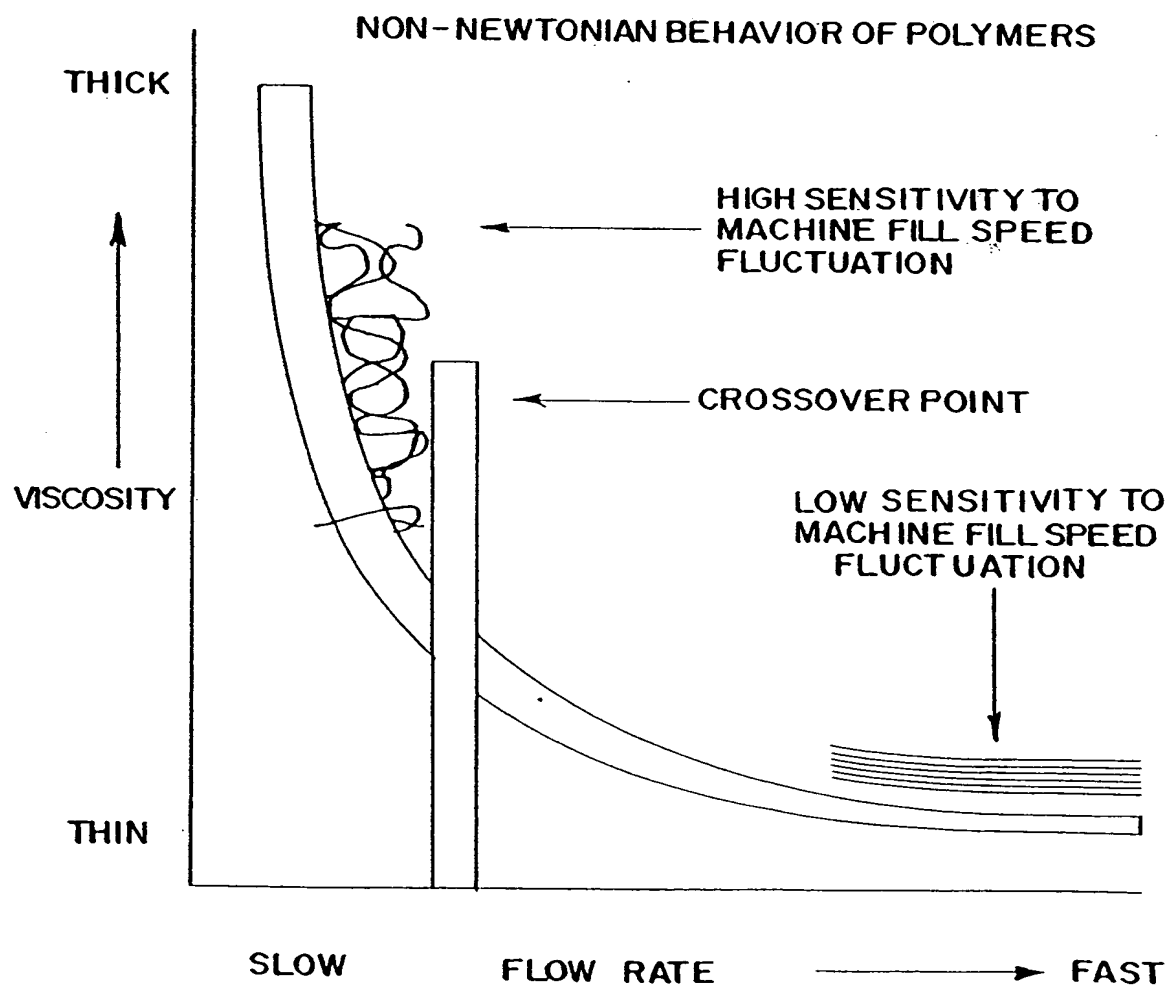





RECEIVED  
AUG 02 2004  
TC 1700

FIG.9a

END OF FILL CAV PSI, PEAK


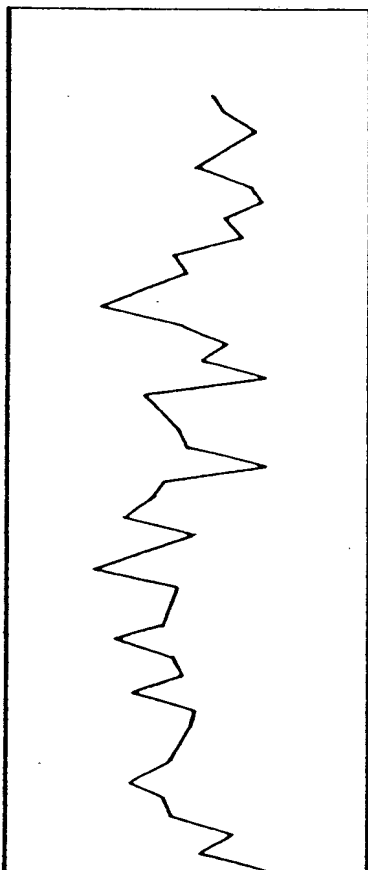


FIG.9b



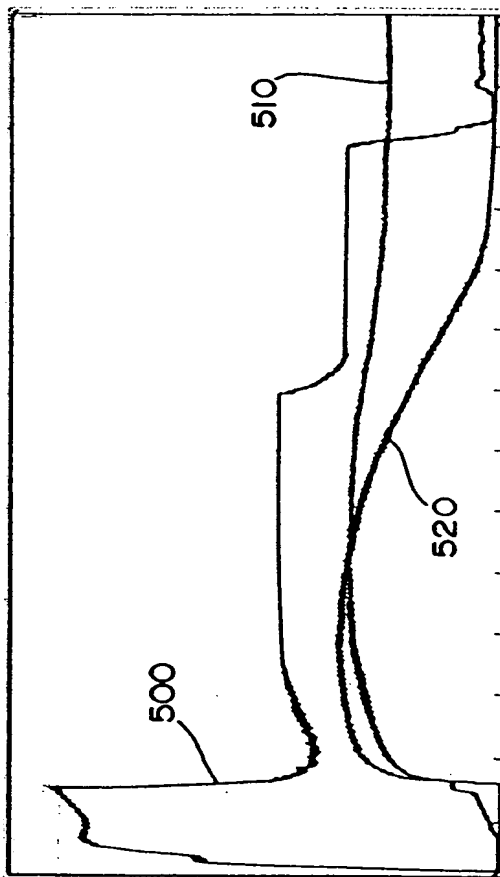

RECEIVED

AUG 02 2004

TC 1700

FIG.9c

END OF FILL CAV PSI, PEAK


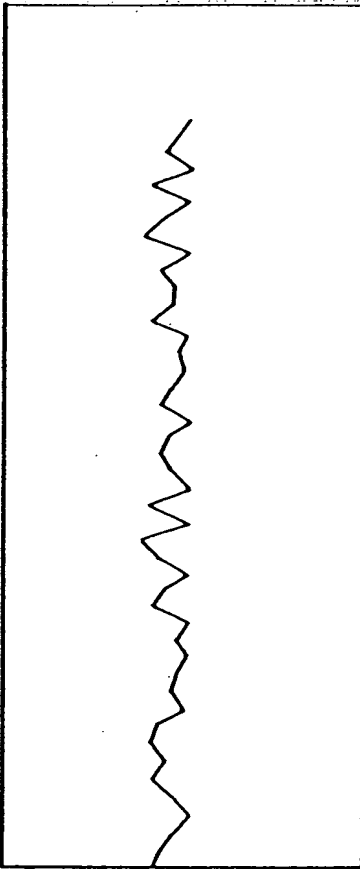


FIG.9d



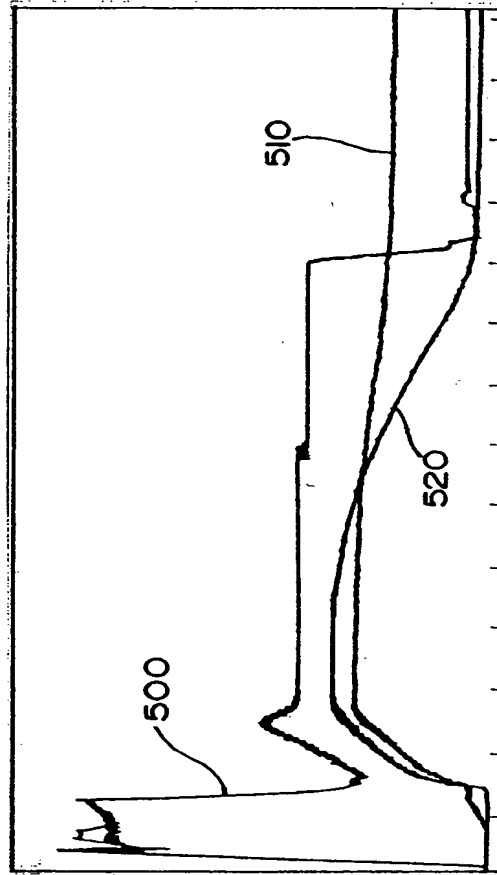

9/9

RECEIVED  
AUG 02 2004  
TC 1700

## FIG. 10

TABLE I

SAMPLE VOICE COIL MOTORS		
	SAMPLE	RESONANCE (HERTZ)
END-OF-FILL CAVITY PRESSURE 4400-4499 PSI	1	9,240
	2	9,272
	3	9,248
	4	9,256
	5	9,288
	6	9,296
	7	9,296
AVERAGE		9,271
MAX		9,296
MIN		9,240
SIGMA		23
END-OF-FILL CAVITY PRESSURE 4500-4700 PSI	1	9,288
	2	9,304
	3	9,280
	4	9,256
	5	9,280
	6	9,320
	7	9,256
	8	9,304
	9	9,288
	10	9,288
	11	9,248
	12	9,280
	13	9,288
	14	9,280
AVERAGE		9,283
MAX		9,320
MIN		9,248
SIGMA		20
END-OF-FILL CAVITY PRESSURE 4701-4800 PSI	1	9,296
	2	9,248
	3	9,312
	4	9,296
AVERAGE		9,288
MAX		9,312
MIN		9,248
SIGMA		28